




**Announcing
NEW ELF-SP3**
Scaled pulse output
For Hunter HC controllers

Introducing an affordable flow sensor for residential and commercial systems



Now the water saving benefits of detecting leaks, broken sprinklers or stuck zone valves are available for all systems using Hunter Hydrowise™ controllers

- ◆ The patented ELF (Enhanced Low Flow) sensor makes it easy to add flow monitoring to systems with lower flow rates, from 20 GPM down to 0.2 GPM. Wider measurement range than any other meter.
- ◆ Instead of estimating your water usage, accurately measure it in real time.
- ◆ 2 Easy to install models
 - ELF-P75-SP3 PVC with 3/4 inch socket weld pipe connections
 - ELF-N10-SP3 with 1 inch male thread connections for any pipe material
 - Install above or below grade on horizontal or vertical pipe
- ◆ Simple to connect
 - 3 color coded wire leads attach to the Power and Sensor terminals of all Hydrowise™ controller models.
 - Wire may be extended up to 1,000 feet
 - Follow set-up instructions for each controller model
- ◆ Output is a scaled 1 pulse = 1 gallon
- ◆ No need for straight pipe lengths before or after the sensor
 - The mounting tee straightens the flow
 - Master valve may be threaded directly onto the downstream side
 - Installed length with a valve is under 12 inches, fitting in a rectangular valve box
- ◆ The ELF with proven reliable impeller technology, makes it easy to conserve water, save money, and maintain landscapes.

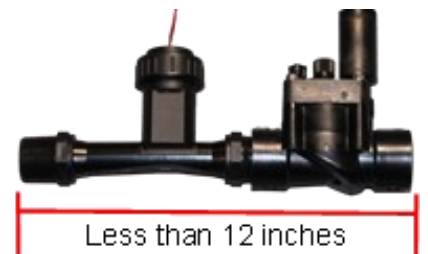

**Backed by CSTs
LIFETIME No hassle
WARRANTY
on flow sensor inserts**